



MASTER VALUE LED spot MV

MAS LED spot VLE D 5.5-80W GU10 930 36D

Delivering a warm, halogen-like accent beam, MASTER VALUE is a perfect fit for spot lighting. Thanks to its high CRI, it realizes more natural colors, creating cozy and comfortable ambiances for residential and hospitality projects, and emphasizing the beauty of merchandise in retail. These LED spots MV GU10 have the familiar look and feel of spot lamps, keeping the classic beauty of glass spots and adding the strong performance of LED technology. The dimming function enables you to create the atmosphere you desire, and it works with broad selection of dimmers. MASTER VALUE also offers more energy savings than normal LED spots.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data

General Information	
Cap-Base	GU10
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
Warranty period	5 years

Luminous Flux	575 lm
Luminous Intensity (Nom)	1,000 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	104 lm/W
Color Consistency	<6
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	575 lm
Photobiological safety according to EN 62471	RG1

Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	36 degree(s)

MASTER VALUE LED spot MV

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power Consumption	5.5 W
Lamp Current (Nom)	27 mA
Wattage Equivalent	80 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V

Temperature	
T-Case Maximum (Nom)	66 °C

Controls and Dimming	
Dimmable	Only with specific dimmers

Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	PAR16
Net Weight (Piece)	0.050 kg


Approval and Application	
Energy Efficiency Class	E
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	6 kWh

EPREL Registration Number	2192976
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) – Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +45 °C

Application Conditions	
can it be used in closed luminaires	No

Product Data	
Order product name	MAS LED spot VLE D 5.5-80W GU10 930 36D
Full product name	MAS LED spot VLE D 5.5-80W GU10 930 36D
Full product code	872110303827200
Order code	929004255902
Material Nr. (12NC)	929004255902
Numerator – Quantity Per Pack	1
EAN/UPC – Product/Case	8721103038272
Numerator – Packs per outer box	10
EAN/UPC – Case	8721103038289



Dimensional drawing



Product	D	C
MAS LED spot VLE D 5.5-80W GU10 930 36D	50 mm	54 mm


MASTER VALUE LED spot MV

Photometric data

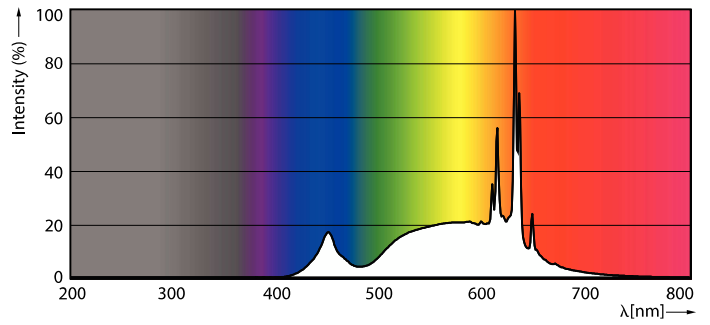


Accent Lighting Spots - MAS LED spot VLE D 5.5-80W GU10 930 36D

Spectral Power Distribution Colour - MAS LED spot VLE D 5.5-80W GU10 930 36D




Light Distribution Diagram - MAS LED spot VLE D 5.5-80W GU10 930 36D

Lifetime

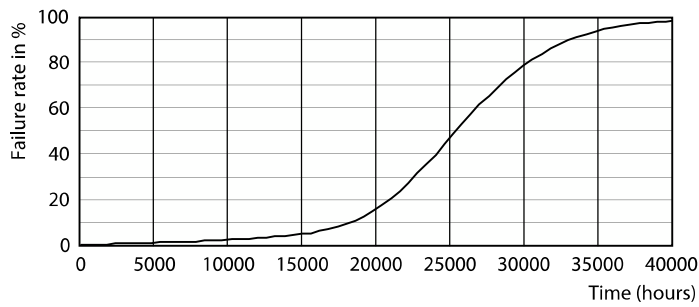

Life Expectancy Diagram

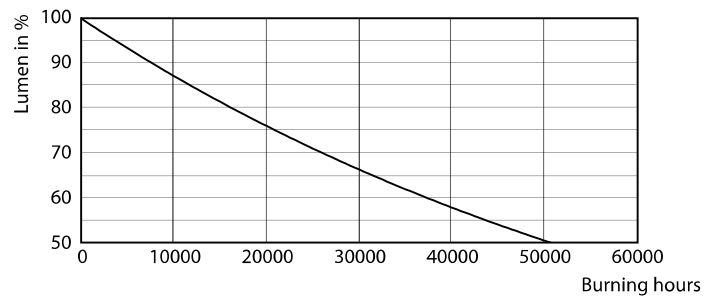

Lumen Maintenance Diagram - MAS LED spot VLE D 5.5-80W GU10 930 36D

MASTER VALUE LED spot MV



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com
2025, June 26 - data subject to change